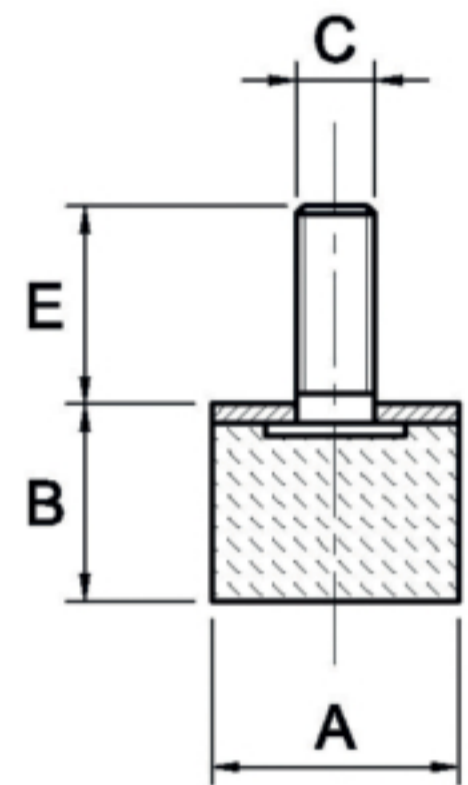


COD.	A	B	C	E	Carico max a Compres. Max Compression Load daN	
A1PM1510	15	10	M4	10	10	1
A1PM1515	15	15	M4	14	10	1
A1PM1610	16	10	M5	12	12	1
A1PM2010	20	10	M6	16	16	1
A1PM2015	20	15	M6	16	18	1
A1PM2020	20	20	M6	16	18	1
A1PM2025	20	25	M6	16	18	1
A1PM2030	20	30	M6	16	16	1
A1PM2515	25	15	M6	18	29	1
A1PM2520/6	25	20	M6	18	29	1
A1PM2520/8	25	20	M8	20	29	1
A1PM2525	25	25	M6	18	29	1
A1PM2530/6	25	30	M6	18	29	1
A1PM2530/8	25	30	M8	20	29	1
A1PM2530/8L	25	30	M8	30	29	1
A1PM3010/6	30	10	M6	20	42	1
A1PM3010	30	10	M8	23	42	1
A1PM3015	30	15	M8	23	42	1
A1PM3020	30	20	M8	23	42	1
A1PM3025	30	25	M8	23	42	1
A1PM3030	30	30	M8	23	38	1
A1PM3040	30	40	M8	23	38	1
A1PM4020	40	20	M8	23	57	1
A1PM4030/10	40	30	M10	28	75	1
A1PM4030/8	40	30	M8	23	75	1
A1PM4035/8	40	35	M8	23	75	1
A1PM4040/10	40	40	M10	28	75	1
A1PM4040/8	40	40	M8	23	75	1
A1PM5020	50	20	M10	28	117	1
A1PM5030	50	30	M10	28	117	1
A1PM5040	50	40	M10	28	117	1
A1PM5045	50	45	M10	28	117	1
A1PM5050	50	50	M10	28	117	1
A1PM6020/12	60	20	M12	37	169	1
A1PM6030/12	60	30	M12	37	169	1
A1PM6040/12	60	40	M12	37	169	1
A1PM6050/10	60	50	M10	35	169	1
A1PM6050/12	60	50	M12	37	169	1
A1PM7525	75	25	M12	37	265	1
A1PM7540	75	40	M12	37	265	1
A1PM7550	75	50	M12	37	265	1
A1PM10040	100	40	M16	45	471	1
A1PM10050	100	50	M16	45	471	1
A1PM10080	100	80	M16	57	380	1


**Caratteristiche**
**MATERIALE CORPO:**

Mescola Gomma NR/SBR

**DUREZZA STANDARD:**

60 Shore A

**TOLLERANZA SULLA DUREZZA:**

+/- 5 SH

**A RICHIESTA:**

Differenti lunghezze della Vite

**PARTE METALLICA E/O FISSAGGIO:**

Vite e Rondella Zincate

**TIPO INSERTO STANDARD:**

Vite pressata sulla Rondella

**Product specification**
**MAIN PART MATERIAL:**

NR/SBR Rubber Compound

**STANDARD HARDNESS:**

60 Shore A

**HARDNESS TOLERANCE:**

+/- 5 SH

**ON REQUEST:**

Different Screw Lengths

**METALLIC PART MATERIAL &**
**FINISHING:**

Zinc Plated Screw and Washer

**STANDARD THREAD:**

Screw pressed on the Washer