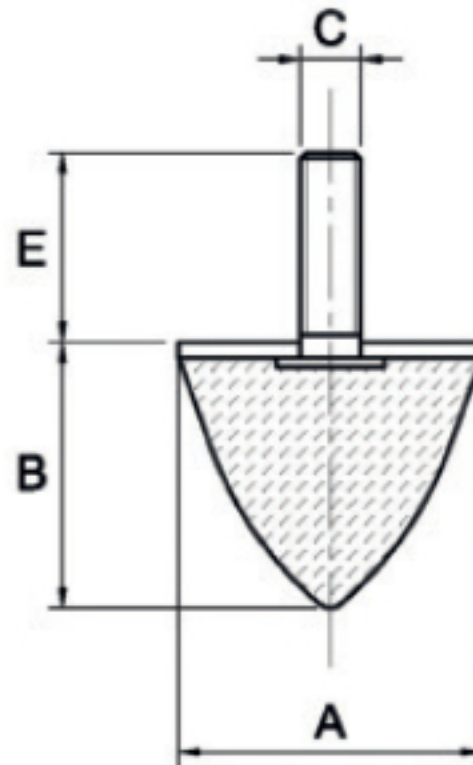


CN
Antivibrante Conico
Shock - Absorber


COD.	A	B	C	E	Carico max a Compres. Max Compression Load daN	
A2CN24	25	22	M6	20	20	1
A2CN26	25	30	M6	18	18	1
A2CN31	30	36	M8	23	25	1
A2CN39	40	30	M8	23	29	1
A2CN41	40	60	M8	23	28	1
A2CN51	50	50	M10	28	54	1
A2CN52	50	64	M8	35	50	1
A2CN61	60	60	M12	33	72	1
A2CN75	75	70	M12	37	117	1
A2CN100	100	85	M16	46	330	1

Caratteristiche
MATERIALE CORPO: Mescola Gomma NR/SBR

DUREZZA STANDARD: 60 Shore A

TOLLERANZA SULLA DUREZZA: +/- 5 SH

A RICHIESTA: Differenti lunghezze della Vite

PARTE METALLICA E/O FISSAGGIO: Vite e Rondella Zincate

TIPO INSERTO STANDARD: Vite pressata sulla Rondella

Product specification
MAIN PART MATERIAL: NR/SBR Rubber Compound

STANDARD HARDNESS: 60 Shore A

HARDNESS TOLERANCE: +/- 5 SH

ON REQUEST: Different Screw Lengths

METALLIC PART MATERIAL & FINISHING: Zinc Plated Screw and Washer

STANDARD THREAD: Screw pressed on the Washer