



- 🇮🇹 » **SERIE 3** » incisione a trazione, pratica e veloce
- 🇬🇧 » **SERIE 3** » incision to pull, fast and practical
- 🇫🇷 » **SERIE 3** » incision à tirer, rapide et pratique
- 🇩🇪 » **SERIE 3** » Einschnitt zu Pull, schnell und praktisch



- 🇮🇹 Regolazione dello spessore di taglio
- 🇬🇧 Regulation of cutting thickness
- 🇫🇷 Double vis de réglage
- 🇩🇪 Register für die Schnittstärke

- 🇮🇹 Incisione
- 🇬🇧 Incision
- 🇫🇷 Incision
- 🇩🇪 Einschnitt

- 🇮🇹 Spacco
- 🇬🇧 Breaking
- 🇫🇷 Sectionnement
- 🇩🇪 Abteigung

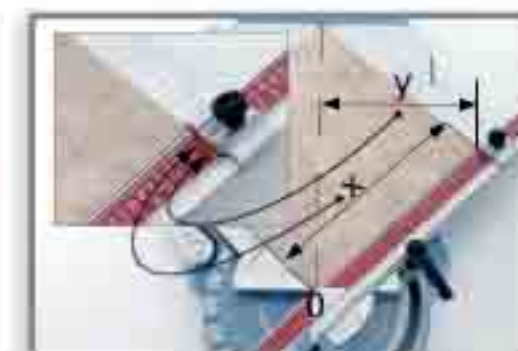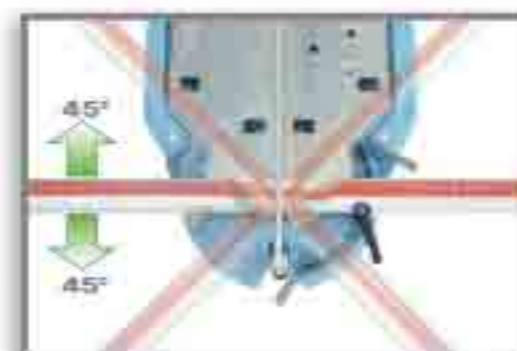

- 🇮🇹 Tasto di posizionamento rapido
- 🇬🇧 Rapid positioning button
- 🇫🇷 Bouton de positionnement rapide
- 🇩🇪 Schnell Positionertaste

- 🇮🇹 Ruota in entrambi i sensi fino a 45°
- 🇬🇧 Rotates through 45° in both directions
- 🇫🇷 Pivote dans les deux sens jusqu'à 45°
- 🇩🇪 In jeglichem Winkel bis 45° orientiert

- 🇮🇹 Doppia scala di misura
- 🇬🇧 Double scale measurement
- 🇫🇷 Mesure double échelle
- 🇩🇪 Doppel-Skala Messung



movie: www.sigmainitalia.com

international patents

| Art. | | | | | | | | |
|------|--------|-------------|-------|----------|----------|-------|----------|-------------------|
| 2G | 37 cm. | 26 X 26 cm. | 15 mm | 600 Kg. | 2,6 Kg. | 6 pz. | 17,3 Kg. | 64 x 43 x 32 cm. |
| 3G | 45 cm. | 31 X 31 cm. | 20 mm | 1060 Kg. | 7,3 Kg. | 2 pz. | 16,9 Kg. | 75 x 41 x 28 cm. |
| 3A | 53 cm. | 37 X 37 cm. | 20 mm | 1060 Kg. | 8,5 Kg. | 2 pz. | 18,0 Kg. | 75 x 41 x 28 cm. |
| 3L | 55 cm. | 38 X 38 cm. | 20 mm | 1060 Kg. | 7,9 Kg. | 2 pz. | 17,2 Kg. | 79 x 41 x 28 cm. |
| 3B | 63 cm. | 44 X 44 cm. | 20 mm | 1060 Kg. | 9,2 Kg. | 2 pz. | 20,0 Kg. | 87 x 41 x 28 cm. |
| 3C | 75 cm. | 53 X 53 cm. | 20 mm | 1060 Kg. | 11,5 Kg. | 2 pz. | 24,0 Kg. | 99 x 41 x 30 cm. |
| 3D | 93 cm. | 65 X 65 cm. | 20 mm | 1060 Kg. | 13,5 Kg. | 1 pz. | 18,5 Kg. | 119 x 40 x 24 cm. |